


Communication Interface Module Replacement

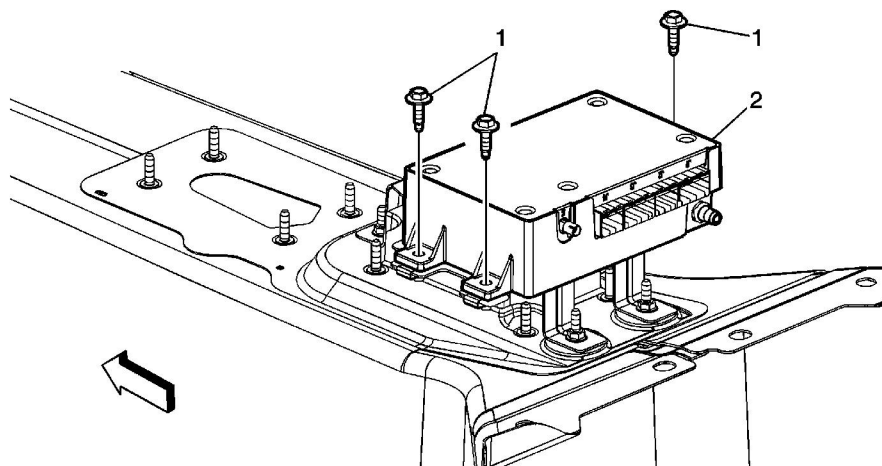

Callout	Component Name
Preliminary Procedures 1. Remove the rear window panel trim. Refer to Rear Window Panel Trim Replacement . 2. Program the communication interface module (OnStar®) after replacement. Refer to Control Module References .	
1	Communication Interface Module Bracket Bolt/Screw Notice: Refer to Fastener Notice in the Preface section. Tighten 9 N·m (80 lb in)
2	Communication Interface Module Assembly